

XHBF LED

Explosion-proof
LED area lighting

RIG-A-LITE™
An Avail Infrastructure Solutions Company

Key Features

- Low profile body, less than 7" high
- Interchangeable optics with Type I, III, V, medium, wide, narrow and very narrow distribution options
- Spring pressure connection terminal block
- Field replaceable LED circuit boards and drivers with quick disconnects
- Optional trunnion mount with five locking positions in 15 degree increments
- Two (2) safety cable attachment points with optional eye-bolts



Additional Features

- Certified for hydrogen atmospheres (Group B)
- Integrated UL 924 Emergency Lighting battery backup option with switching capability
- Mates directly to SXP/SXPJ HID mounts
- 0-10V dimming, range 10-100%
- Standard 10kV surge protection
- 5-year warranty

Standard Materials

Body:

A360 aluminum
(less than .4% copper
content) with baked-on
gray epoxy finish

Gaskets:

One-piece silicone

Lens:

Tempered Glass

Hardware:

Stainless Steel

Classifications

- Class I, Division 1, Groups B, C & D
- Class II, Division 1, Groups E, F & G
- Class III
- Simultaneous Presence
- Class I, Zone 1 AEx db IIB+H2 T4 Gb
- Class II, Zone 21 AEx tb IIIC 135°C Db
- UL 1598A Marine Outside Type
- UL 1598 Wet Locations
- UL 8750 LED Safety
- UL 844 Hazardous Locations
- UL 924 Emergency Lighting
- -40°C to 65°C Ambient Temperature
- CSA C22.2 No. 250.0-08
- CSA C22.2 No. 137-M1981
- NEMA 4X
- ABS Type Approved
- IP66
- Paint Spray Booth
- Tested to LM79 & LM80

IECEx

- Ex db op is IIB+H2 T4 Gb
- -40°C ≤ Tamb ≤ 65°C, IP66
- Ex op is tb IIIC T135°C Db
- -40°C ≤ Tamb ≤ 55°C, IP66
- Certificate: IECEx ITS 19.0026X


ATEX

- $\text{C} \text{C} \text{E} \text{X}$ II 2 G D
- Ex db op is IIB+H2 T4 Gb
- -40°C ≤ Tamb ≤ 65°C, IP66
- Ex op is tb IIIC T135°C Db
- -40°C ≤ Tamb ≤ 55°C, IP66
- Certificate: ITS19ATEX104994X

Certification Guide

Model	Mount	Watts	Operating Voltage	Total Lumens	Lumens per Watt	CRI	CCT	Ambient Temperature*	Ex db	Class I, Div. I, Group C, D	Class II, Div. 1, Group E, F, G Class III	Simul Presence	Paint Spray Booth	Supply Wire Suitable Temp. °C	
EXHBF15L	C, P, T, W	153W	120V - 277V 50/60 Hz 347V/480V 60Hz	15044	98	74	5255	-40°C < Tamb < 65°C	T4	-	-	-	-	90°C	
EXHBF13L	C, P, T, W	136W		13743	101	73	5228	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
EXHBF12L	C, P, T, W	125W		12515	100	73	5190	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
EXHBF11L	C, P, T, W	107W		11327	106	73	5187	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
EXHBF09L	C, P, T, W	96W		10244	106	73	5171	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
EXHBF08L	C, P, T, W	80W		8645	102	74	5157	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
EXHBF06L	C, P, T, W	60W		7094	105	74	5119	-40°C < Tamb < 65°C	T4	-	-	-	-	-	90°C
XHBF15L	C, P, T	153W		15044	98	74	5255	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF15L	C, P, T	153W		15044	98	74	5255	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF13L	C, P, T	136W		13743	101	73	5228	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF13L	C, P, T	136W		13743	101	73	5228	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF12L	C, P, T	125W		12515	100	73	5190	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF12L	C, P, T	125W		12515	100	73	5190	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF11L	C, P, T	107W		11327	106	73	5187	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF11L	C, P, T	107W		11327	106	73	5187	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF09L	C, P, T	96W		10244	106	73	5171	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF09L	C, P, T	96W		10244	106	73	5171	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF08L	C, P, T	80W		8645	102	74	5157	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF08L	C, P, T	80W		8645	102	74	5157	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C
XHBF06L	C, P, T	60W		7094	105	74	5119	-20°C < Tamb < 65°C	-	T4	-	-	-	Yes	90°C
XHBF06L	C, P, T	60W	7094	105	74	5119	-20°C < Tamb < 54°C	-	T5	135°C	T4	Yes	Yes	90°C	

* Ambient temperature range is 0°C < Tamb < 40°C when EM option is selected.

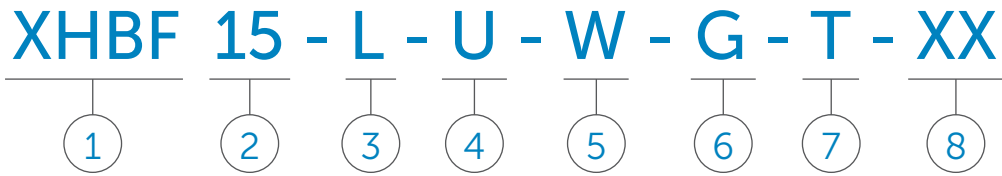

1
BASIC LUMINAIRE
 XHBF = North American Standards
 EXHBF = ATEX and IECEx Standards

2
LAMP WATTAGE
 15 = 153 Watt
 13 = 136 Watt
 12 = 125 Watt
 11 = 107 Watt
 09 = 96 Watt
 08 = 80 Watt
 06 = 60 Watt

3
LAMP TYPE
 L = LED (5000K CCT)

4
VOLTAGE/FREQUENCY
 U = 120- 277V 50/60HZ
 N = 347/480V 50/60HZ

5
OPTICS*
 Blank = Type V Medium
 1 = Type I
 3 = Type III
 N = Type V Narrow Beam
 W = Type V Wide Beam
 VN = Type V Very Narrow

6
GUARD
 G = Stainless Steel Wire Guard

7
MOUNTING STYLE
 P = 3/4" Pendant Mount
 P1 = 1" Pendant Mount
 C = 3/4" Ceiling Mount
 C1 = 1" Ceiling Mount
 W = 3/4" Wall Mount
 W1 = 1" Wall Mount
 T = Trunnion Mount
 TP = Trunnion / 3/4" Pendant Mount

8
MOUNTING STYLE
 EB = Eye Bolts (2)
 EM = UL 924 Emergency Lighting^{1,4}
 FB1 = Single Fuse Block²
 FB2 = Double Fuse Block²
 30 = 3000K CCT
 40 = 4000K CCT



availinfra.com/rig-a-lite

8500 Hansen Road
 Houston, TX 77075
 (713) 943-0340

* 60 and 80 watt models available as Type V Medium only

- 1 EM option not available with 347/480V, EXHBF or 60 and 80 watt models.
- 2 When selected one fuse block is provided for 120 or 277V, two fuse blocks/fuses are provided for 208-240V or 480V. Fuse options not available for 347V, fixtures listed for use in Canada, marine listed fixtures or fixtures with EM option.
- 3 Not available on XHBF models.
- 4 10.4 watts delivered for 90 minutes.

Catalog logic is for explaining catalog number structure only. Not all combinations are possible; consult factory for catalog numbers not listed in charts.